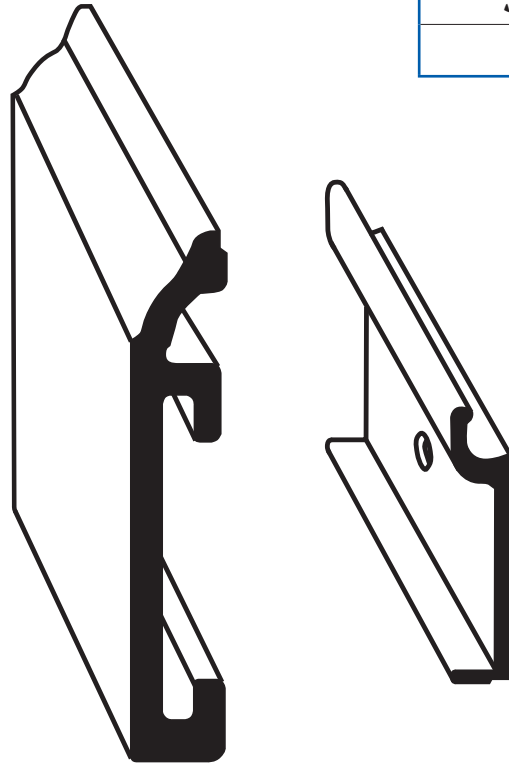


# Made Rite

## INTERIOR MOULDING SNAP-ON BASEBOARD SYSTEM DESIGNED BY *MADE-RITE*







Made Rite™ introduces Snap-on Baseboards™ the patented snap-on baseboard system. This two part system creates a covered channel behind the outer baseboard profile that clips to the wall-attached inner profile. The baseboard can be removed and replaced at will for wall inspection, or access and updates to a variety of electrical and data cables. Snap-on Baseboards™ is easy to install and convenient anywhere modular access is common or necessary; termite inspection, office cubicles, mobile homes, new wiring or security installations, to name a few. Once purchased this system will provide a lifetime of use and benefits that no other baseboard offers.

- Easy to install
- Will not absorb moisture.
- Pre-Finished, but paintable.
- No more wall damage when removing trim for termite or mold inspection
- No more messy glue installation
- Easy to change out cables
- Matching inside and outside corner clips

**Made Rite**

**SNAP-ON BASEBOARD SYSTEM™**

PROFILE	CODE	PATTERN	SIZE	LENGTH	WEIGHT PER CARTON	PIECES PER CARTON
	0245-0012-986	SNAP-ON BASEBOARD	3¼" x ½"	12'	35 lbs	14
	B9000	BASEBOARD WALL CLIP				
	B9010	INSIDE CORNER CLIP				
	B9020	OUTSIDE CORNER CLIP				

**ADVANTAGES**

- Will not rot. Resists mildew and fungus.
- Will not absorb moisture.
- Excellent R value.
- Carries a UL-VO-94 fire rating.
- Smoke contribution is well below ASTM standards.
- Passed salt water exposure of 1000 hrs.
- Surface hardness is superior to pine.

**JOINING OR FASTENING**

- Recommended screws: Drywall screws with large thread or flute.
- Recommended adhesive: Sub-floor adhesive or PVC cement.
- Holes can be filled with colored caulk or putty.
- To raise dents or marks on the profiles, use a hair dryer.

**PAINTING**

Painting of millwork profiles is not required for varying periods of time, depending on exposure to ultraviolet rays and pollution. Should painting be desired, follow these instructions:

- Clean surface to be painted.
- For a good one-step process, paint surface with acrylic exterior latex paint.
- For latex paint, use a latex or acrylic primer before applying the finish coat.

**OIL BASE PAINTS**

- Lightly sand surface.
- Paint surface with fast-drying alkyd primer.
- Allow to dry.
- Apply finish coat.

Distributed by:

**Made Rite**

Questions? [zane@hawaii.rr.com](mailto:zane@hawaii.rr.com)

Office: 808-398-5387 • Fax: 808-356-0538  
Mailing address: P.O. Box 6305 • Kaneohe, HI 96744  
Warehouse: 649 Terrell Mill Rd., College Park, GA 30349